

AQUA

as Essential as Water




Reliable Solution
Superior Quality
Universal Design
Affordable to All

by ingenico



as Essential as Water

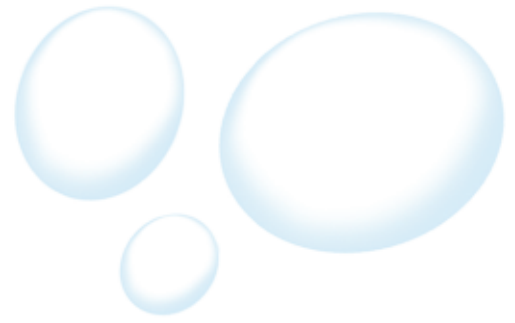

From San Paulo to Shanghai to San Francisco, access to electronic payment is essential. AQUA by Ingenico makes it affordable for even the smallest business to handle secure credit and EBT transactions – even businesses with less than one transaction a day.

As water is to your body, AQUA is vital to your business, customers and clients.

- > **PERFORMANCE is AFFORDABLE.** Aqua, the most affordable payment terminal which enables magnetic stripe and EMV transactions, is also a high performing space-saving countertop that features one of the smallest footprints in the market.
- > **Now ENTRY LEVEL means TOP QUALITY.** Relying on Ingenico experience, AQUA performs fast and secure transactions utilizing Ingenico’s unique secured UNICAPT 32 Platform with PCI PED certified design and powerful 60 MHz processor.
- > **ACCESSIBLE to ALL.** Easy to set-up and easy to use, AQUA provides equal access to payment for everyone. Its universal design complies with the most demanding international standards.
- > **RELIABILITY as a MUST.** As good as it gets, AQUA has been designed and tested following Ingenico’s proven processes to ensure full reliability. If your business requires its’ first electronic payment terminal – AQUA was made just for you.

Processor

- 32 bit ARM processor @ 60 MHz

Memory

- 2MB PSRAM and 8MB Flash

Security

- Integrated PIN pad
- PCI PED on-line/off-line approved
- Interac Chip & Frontal Attack Protection certified

Printer

- Thermal, easy loading, 7 lines per second
- Paper end detection, full graphics printing

Display

- Graphic, 128 x 64 pixels. LCD, backlit

Keypad

- 15 keys including scroll function key
- ADA-like design (Americans with Disabilities Act)

Communication

- V34 modem, transfers up to 33.6K bps

Magnetic card reader

- Triple Track ISO 1/2/3

Smart card reader

- EMV Level 1 approved
- UNICAPT 32 EMV Level 2 approved
- ISO 7816 1-2-3
- Async/Sync T=0 & T=1

Secure Access Modules

- 1 SAM slot

Connectivity

- 1 RS232 for peripherals

Environment

- Operating temperature: +5°C to +40°C (41F to 104F)
- Storage temperature: -20°C to +70°C (-2F to 158F)

Dimensions

- 227 x 97 x 80 mm (8.9 x 3.8 x 3.4 in.)

Weight

- 465 gr. (1 lb.)



Ingenico Inc.
6195 Shiloh Road, Suite D - Alpharetta, GA 30005
Tel: (678) 456-1200 - Fax: (678) 456-1201 - www.ingenico-us.com

Ingenico Canada Ltd.
79 Torbarrie Road - Toronto, Ontario - Canada M3L 1G5
Tel: (416) 245-6700 - Fax: (416) 245-6701 - www.ingenico.ca

Groupe Ingenico 192, avenue Charles de Gaulle - 92200 Neuilly sur Seine - France
Tel : 33 (0)1 46 25 82 00 - Fax : 33 (0)1 47 72 56 95 - www.ingenico.com

All rights reserved. This document is not binding and the specifications hereabove can be modified without prior consent.