



# vivo<sup>pay</sup> 5000m

## **Contactless, Mobile NFC & Mag-Stripe Payment System with Enhanced Consumer Experience**

**ViVOpay 5000m interactive display and flexible architecture enable advanced payment programs while supporting legacy magnetic-stripe payments.**


ViVOpay 5000m is a powerful contactless payment reader that can be adapted to existing POS and ECR systems to provide an integrated contactless and MSR functionality as well as an interactive display for customers. The flexible architecture and advanced functionality of the ViVOpay 5000m makes it an ideal solution for emerging mobile commerce and promotion applications based on NFC mobile phone technology.

The ViVOpay 5000m LCD screen allows merchants to display key messages to guide the customer through the payment process, and communicate promotions, incentives and other messaging to consumers using NFC mobile phones or advanced loyalty programs.

ViVOpay 5000m is equipped with a powerful ARM processor enabling it to support multiple payment applications such as EMV-Based OneSmart<sup>®</sup> MasterCard<sup>®</sup> PayPass<sup>™</sup> and Visa<sup>®</sup> payWave qVSDC as well as MSD-based MasterCard<sup>®</sup> PayPass<sup>™</sup>, ExpressPay from American Express<sup>SM</sup>, Visa<sup>®</sup> PayWave, Discover<sup>®</sup> Zip<sup>™</sup> and private-label contactless gift and loyalty cards.

### **Benefits**

- **Interactive Display:** Screen prompts guide consumers through the payment process.
- **NFC Mobile Phone Enabled:** Display and flexible architecture make it ideal for NFC mobile payments and promotions
- **Single Point of Acceptance:** Integrated contactless and MSR device accepts cards in a single attractive customer-facing form factor
- **Future-Proof:** Firmware can easily be updated remotely
- **Low Cost:** Upgrade an existing POS system at only a fraction of the cost of installing new contactless-enabled POS.

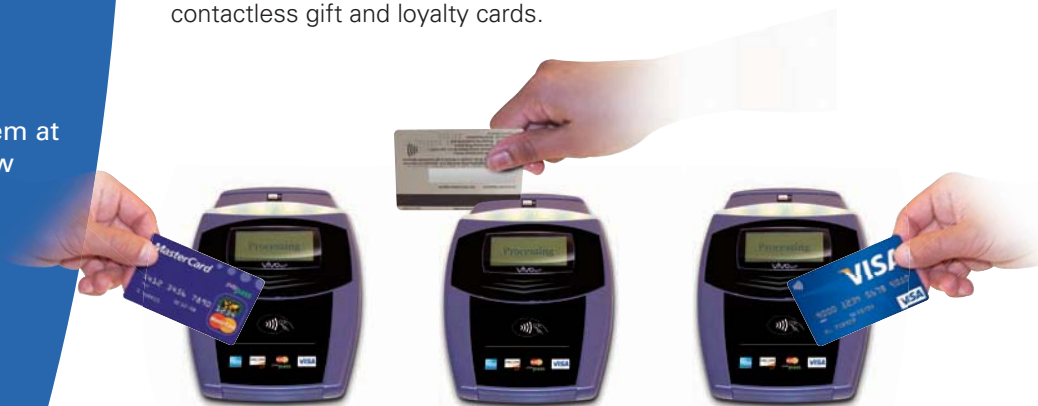

*Single point of acceptance for all major contactless payment cards, key fobs, and NFC phones as well as existing magnetic-stripe cards.*

# vivo<sup>pay</sup> 5000m

The flexible architecture and advanced functionality of the ViVOpay 5000m make it an ideal solution for emerging mobile commerce and promotion applications based on NFC<sup>1</sup> mobile phone technology



(1) Near Field Communication

## Features

- **Contactless:** Compatible with ISO/IEC 14443 Type A and B, NFC and Mifare<sup>®</sup>.
- **Magnetic-Stripe:** Track 1 and 2, bi-directional.
- **Compatibility:** Interfaces to a variety of POS and ECR host systems from leading vendors such as VeriFone, NCR, Ingenico, Hypercom, Thales, Gemalto, Radiant, IBM, Sharp, Micros, Partech, Xpient, Compris, Aloha.
- **Implementations:** Retail locations, quick service restaurants, ticket booths, multi-lane merchants, single-lane merchants, hospitality, car rental, and much more.
- **Consumer Intuitive:** Equipped with LCD screen and sound feedback to guide consumers through the payment process.
- **Secure:** Provides highly secure transaction whether financial, pre-paid, loyalty, or gift.
- **Large Customizable Overlay Area:** Large customizable overlay area provides a promotion platform for retailers.
- **Intellectual Property:** Protected by several patent-pending applications.

\* ViVOtech, ViVOmob, ViVOcard, ViVOpay, ViVOplatform are trademarks or registered trademarks of ViVOtech Corporation. All other trademarks or brand names are the properties of their respective holders. Features and specifications are subject to change without notice.

## Specifications

### Hardware

Mag-Stripe:	Track 1 & 2, bi-directional
CPU:	ARM processor 512Kbyte of standard memory
Input Power:	7.5-12VDC, 700mA
Human Interface:	128 x 64 bit graphical display 4 programmable LEDs to indicate power-on and successful read Buzzer

### Contactless Transactions

Interface:	13.56MHz ISO 14443 Type A/Type B and Mifare
Payment Applications*:	American Express ExpressPay Discover Zip Mastercard PayPass Mstripe (M/Chip capable) Visa payWave MSD and (qVSDC capable) JCB/Jspeedy
Other Contactless Applications:	ViVOwallet 1 Pass-Through mode

### Physical

Height:	157.5mm (6.25 in)
Width:	101mm (4 in)
Depth:	30mm (3 in)
Weight:	280g (0.6 lbs)

### Environmental

Operating Temp:	0 to 40 C (32 to 104 F)
Storage Temp:	-18 to 70 C (0 to 158 F)
Operating Humidity:	20% to 90% non-condensing

\*Specific product specification will depend on hardware and software configuration

## United States

**ViVOtech  
Corporate Headquarters**  
451 El Camino Real,  
Santa Clara, CA 95050  
**Phone:** (408) 248 7001  
**Fax:** (408) 248 7002

## International Locations

**Asia**  
Group 67 Ubi Avenue 1, #06-02  
Starhub Green, North Wing,  
Singapore 408942  
**Singapore**  
**Phone:** +65 6634 8289  
**Fax:** +65 6634 8283

**Europe  
Germany**  
Phone: +49 (6047) 988 2874



**www.vivotech.com**  
**sales@vivotech.com**